



30 G/H AIR-COOLER OZONE GENERATOR

Absolute Ozone Generators are a quantum leap in ozone technology. Due to very high precision design, utilizing microfluidic platform technology, and excellent durability, all air-cooled Absolute Ozone I ozone generators reliably deliver ultra-pure, high concentration ozone for a wide variety of special applications. The performance is unequaled in the industry with the capability of producing high concentration ozone up to 22% by weight - quaranteed.

SPECIFICATIONS

ATLAS 30UHC

Ozone (O3) Production: 30 g/h Working Pressure: 20 PSIG

Concentration: 22% by weight Guaranteed

Feed Gas (O2) Flow Rate: 0.1-4 SLPM

Control Power Requirements: 120 V ~ +/-10%, 50/60 Hz, Single Phase, 5.0 A

220 V ~ +/-10%, 50/60 Hz, Single Phase, 3.5 A


Physical Connections: O2 Inlet: 0.25" SS316 Comp. Swagelok Type Connector

O3 Outlet: 0.25" SS316 Comp. Swagelok Type Connector

SMARTEST OZONE GENERATOR IN THE WORLD

NEW FEATURES

Introducing the first of its kind SMART ONBOARD CONTROL & DIAGNOSTICS SYSTEM included on all Absolute Ozone I ozone generators. This new technology delivers prompts on the display which allows the operator the ease and convenience to monitor most operating parameters including temperature, pressure, voltage, and more all on the convenience of a touch-screen 5" LCD display. Moreover, the control system is designed to maintain constant ozone production during voltage fluctuations (within range), adjust power automatically to accommodate for different or fluctuating gas pressures, automatically lower power if operating in hot ambient temperature, and more!

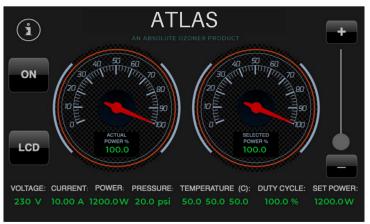

The LCD screen displays the following parameters:

- Selected power setting %, so you will be able to see on the screen power selected by the remote control or slider
- Actual system power (% & Watt)
- The system voltage (V)
- The System Current (Amp)
- The temperature inside the ozone cell
- The LCD screen will allow by touch to switch the generator on and off and to adjust desired power by moving the slider on the screen with your finger up or down

ON-BOARD LIVE AUTOMATIC DIAGNOSTICS

In a case when incorrect operating parameters are applied to an ozone generator the unit is switched off by the control system and the LCD screen will indicate which parameters caused the generator shutdown.

In a safety shutdown mode, the generator will be constantly monitoring operating parameters, and the moment they are corrected the generator will restart automatically, without any assistance.

WARNING

OZONE CELL TEMPERATURE TOO HIGH

CHECK AMBIENTE TEMPERATURE AND/OR
AIR FLOW THROUGH OZONE GENERAOR FOR
ABSTRUCTIONS

WARNING!

OZONE CELL CONTAMINATION

PLEASE ELIMINATE SOURCE OF CONTAMINA-TION AND CONTACT SERVICE FOR FURTHER INSPRIJECTIONS

WARNING!

OZONE SENSOR PROBLEM

OZONE GENERATOR WILL AUTO-RESTART IN PROBLEM PERSISTS PLEASE CONTACT SERVICE IMMEDIATELY

WARNING

OZONE CELL PRESSURE TOO LOW

CORRECT THE PROBLEM BY REMOVING POSSIBLE RESTRICTIONS ON O2 LINE AND ADJUST

03 FLOW ACCORDING TO PERFORMANCE

CHART

WARNING

SUPPLY VOLTAGE TOO LOW

CHECK WIRING AND SUPPLY VOLTAGE AND

CORRECT BEFORE TURNING ON OZONE GEN
ERATOR AGAIN

WARNING!

SUPPLY VOLTAGE TO HIGH

CHECK WIRING AND SUPPLY VOLTAGE AND CORRECT BEFORE TURNING ON OZONE GEN-ERATOR AGAIN

WARNING

OZONE CELL PRESSURE TOO HIGH

ADJUST PRESSURE REGULATOR TO SPECIFIED WORKING PRESSURE TO CORRECT PROBLEM

WARNING

SYSTEM COMMUNICATION PROBLEM

OZONE GENERATOR WILL AUTO-RESTART IN
PROBLEM PERSISTS PLEASE CONTACT SERVICE
IMMEDIATELY

WARNING!

INCORRECT REMOTE CONTRL VOLTAGE

PLEASE CORRECT R/C WIRING AND OZONE GENERATOR WILL AUTO-RESTART SEE MANUAL FOR MORE INFO

UNPARRALLED FOR AIR COOLED PERFORMANCE

Absolute Ozone I Ozone Generators produce ozone unsurpassed by competitors' high concentration ozone. Laws of physics dictate that the maximum amount of ozone dissolved in water is proportional to the ozone concentration produced by the ozone generator. Therefore, a BLUET-ECH ozone generator will dissolve more ozone in water and provide higher disinfection rates in comparison to most 60g/h ozone generators available on the market today. This high efficiency and high concentration ozone will save the user as much as \$12,000 on the price of the ozone system even for a small-scale system.


To see more details regarding calculations, please visit www.ozone-generator.com

Oxygen Flow	Gas Press. (PSIG)	Power (%)	Ozone Conc. (g/Nm3)	Ozone Prod. (G/H)	Ozone Conc. (%w/w)
0.4	20	40%	343.20	7.11	22.24
3.0	20	100%	138.40	22.48	9.38

DESIGN

Absolute Ozone I Ozone Generators have a modular design and come standard with special universal flanges and tabs that allow the user not only to mount the ozone generator in any po- sition but to stack them and connect multiple ozone generators in stacks to achieve any ozone concentration required or in to expand the ozone system in the future if necessary to total ozone production up to 5kg/h or higher.



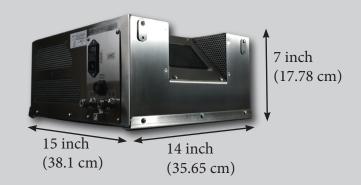

All parts and components used in Absolute Ozone I Ozone generators have been designed to work for 15-20 years and do not require any repairs or replacements, saving a substantial amount of money over that period of time and offering the lowest TCO (Total Cost of Ownership) in the industry. Leak-proof construction tested at up to 150 PSIG, corrosion-resistant stainless steel or aluminum enclosure, highest quality components, and materials used, further enhance reliability. Result: No downtime, No hidden costs.

5-YEAR WARRANTY - THE ONLY PERFORMANCE GUARANTEE IN THE INDUSTRY

5 Years Parts and Labour Warranty + The Only Performance Guarantee in the Industry*. We are confident that Absolute Ozone generators will provide great performance and reliability for many years of service saving you money on repairs and downtime.

'Right on Spec Warranty' – "If in an unlikely event a product that we send you doesn't meet or exceed our published specifications, we'll send you one that does or refund your money if we can't.

HIGH-PRESSURE OPTIONS ARE AVAILABLE

Absolute Ozone I Ozone generators can be tuned to work at higher pressure up to 80 PSIG (95 PSIA), which removes the necessity of installing ozone pressure booster and it saves money on the booster and its service/maintenance. 30 - 80 PSIG pressure range is ideal for soil remediation applications and others where high-pressure ozone is required.

ULTRA PERFORMANCE WITH LOW OXYGEN DEMAND

It is obvious that a higher concentration of ozone in the oxygen mixture produced by Absolute Ozone generators means that much less oxygen is required for the same ozone production. e.g. ATLAS30 requires only 4 SLPM (Standard Litres Per Minute) to produce 30 g/h of ozone (not 9-14 SLPM, common in the industry today). When operating Absolute Ozone Generators you may need to purchase only 1 Oxygen concentrator instead of 2 or even 4 required by competitor's Generators.



A FEW MAJOR BRANDS THAT HAVE SUCCESSFULLY UTILIZED ABSOLUTE OZONE | OZONE GENERATORS

- 3M
- LEVI JEANS
- ABERCROMBIE & FITCH
- NASA
- GE
- OXFORD INSTRUMENTS
- HARVARD UNIVERSITY
- STANFORD UNIVERSITY
- WESTERN UNIVERSITY
- JOHNSON & JOHNSON
- US ARMY
- US NAVY
- USA GOVERNMENT
- PEPSI
- COCA COLA
- BOEING
- UNIVERSITY OF SYDNEY
- HOWARD HUGHES MEDICAL
- CANADIAN TIRE
- ENBRIDGE
- GOVERNMENT OF CANADA
- ALBERTA GOVERNMENT
- OAK RIDGE NATIONAL LABORATORY

- LAM RESEARCH
- INNOVOTECH
- SQWINCHER
- CAITAC GROUP
- AGVENTURES
- OREGON STATE UNIVERSITY
- HALEY & ALDRICH
- VERTEX
- BERGEN FRUIT AND NUT COMPANY
- JPL (JET PROPULSION LABORATORY)
- ARCTIC CHILLER
- PARKER
- BASF THE CHEMICAL COMPANY
- INDIANA INSTITUTE OF TECHNOLOGY
- ACKLANDS GRAINGER
- CORAL WORLD OCEAN PARK
- WEM WORLD WATER PARK
- GOLD'N PLUMP
- MACNEIL
- MANDALAY RESORT
- TRANSALTA GENERATION COMPANY
- BIOX
- SNC LAVALIN

GET IN TOUCH

Absolute Ozone began operations in 1985 and since then has been become an international leader in the ozone generating technology and development, supplying ozone generators to over 100 countries worldwide. For the last 30 years, we have been focusing our efforts on making all projects of our clients successful and on providing the most reliable, economic, and effective ozone generators to them.

That is why we are offering a unique opportunity to all of our customers not only by providing verifiably the most advanced, effective, and economical Absolute Ozone generators to them but actually by ensuring that the equipment we provide will be effective and will make their project successful, as well as it will save them a lot of money over the time that the equipment will be working for them. Most importantly our technical assistance to our customers is complimentary, unlimited, and is absolutely free of charge.

Our assistance to our clients for over the past two decades not only provided them with the most reliable and effective working ozone systems but provided tremendous savings on operating expenses to them, as Absolute Ozone generators do not require any service repairs or maintenance first 20 years of use, when installed and used correctly.

CALL US TODAY AND LET'S DISCUSS YOUR UPCOMING OR CURRENT PROJECT

Phone: 780-486-3761 **Toll Free (US & Canda):** 1-877-486-3761

Email: Office@AbsoluteOzone.com

Location: 10712-181 ST NW Edmonton, Alberta, Canada T5S1K8

Website: www.AbsoluteOzone.com